

PRODUCT DATA SHEET · EN

FOS RDM Splitter 6


DMX splitter with RDM, 6 outputs

RDM/DMX signal amplifier and splitter with 1 input and 6 outputs. Required when the DMX cable line is longer than 100 m or has more than 32 DMX devices.

6	100/240 V	6 W	1.8 kg
OUTPUTS	POWER SUPPLY	MAX. CONSUMPTION	WEIGHT

Key features

- RDM E1.20 compliant
- 1 input and 6 outputs for sending the RDM/DMX signal to DMX fixtures
- DMX In, DMX Thru and DMX Out connectors in 3-pin and 5-pin versions
- 100% isolation of all inputs and outputs
- LED signal and power indicator for the output
- Red power indicator; the signal indicator lights up when the unit receives an RDM/DMX signal

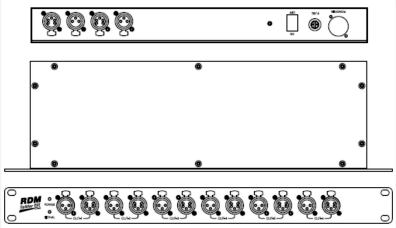

Product overview
Manufacturer's drawing: rear panel, top view, front panel

Technical data

Type	RDM/DMX signal amplifier and splitter
Compliance	RDM E1.20
Channels	1 input to 6 outputs
DMX In, Thru, Out	3-pin and 5-pin
Isolation	100% isolation of all inputs and outputs
Power supply	100/240 V AC, 50/60 Hz
Fuse	F1A / 250 V
Power consumption	max. 6 W
Dimensions	482 × 44 × 147 mm
Weight	1.8 kg

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, fos-lighting.eu →

⚠ **The product must be installed by a qualified specialist, and all maintenance work must be carried out by a qualified electrician.**

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD
Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems
Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl