

PRODUCT DATA SHEET · EN

FOS DMX Operator


DMX lighting controller with faders

DMX lighting controller with faders: controls up to 192 DMX channels and up to 12 separate intelligent DMX fixtures.

192	up to 12	240	2.25 kg
DMX CHANNELS	FIXTURES	SCENES	WEIGHT

Key features

- Stores up to 6 chases with separate fade times and step speeds
- 8 independent faders, switching between channel banks PAGE A (1-8) and PAGE B (9-16)
- Built-in microphone: sound-triggered playback of scenes and chases, with adjustable sensitivity
- MIDI control: selectable MIDI channel from 1 to 16, the controller receives MIDI notes only
- USB interface: backup and reloading of settings, firmware updates (USB stick not included)
- The BLACKOUT button switches the outputs of all channels off or on

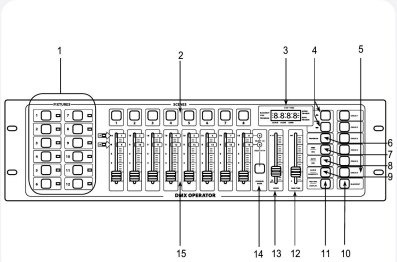

Front panel

1 FIXTURE buttons
2 SCENE buttons
3 LCD display
4 BANK buttons
5 CHASE buttons
12 FADE TIME slider
13 SPEED slider
15 FADERS (1-8)

Manufacturer's drawing, EN labels; legend lists selected elements

Technical data

DMX channels	max. 192
Fixtures	up to 12, up to 16 DMX channels per fixture
Scenes	30 banks of max. 8 scenes, 240 in total
Chases	up to 6, up to 240 steps in one chase
Fade time	FADE TIME slider, from 0 to 30 s
DMX connector	3-pin
DC power input	9 V - 12 V DC, min. 500 mA
Dimensions (L, W, H)	133.35 × 482.6 × 63.5 mm (5.25″ × 19″ × 2.5″)
Weight	2.25 kg (5 lbs)
Place of use	indoor use only

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, fos-lighting.eu →

⚠ Before using the device, read the entire user manual and follow the safety instructions.

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD

Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems

Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl