

PRODUCT DATA SHEET · EN

FOS AirLink IP65

Wireless DMX transceiver

Wireless DMX transceiver for controlling lighting fixtures that use the DMX 512 protocol. It can work as a transmitter or a receiver, with a range of approx. 400 m in line of sight.

approx. 400 m	IP65	512	1.40 kg
RANGE	PROTECTION RATING	DMX CHANNELS	NET WEIGHT

Product page and B2B enquiry
vex-systems.pl

Product data sheet · version 1.0 · 26.11.2026
data per manufacturer's manual er. 1.0 (20250903) · product code L007847

Key features

- Works as a transmitter (TX) or receiver (RX), selected by button
- Fully compatible with W-DMX
- Plug & Play: quick and easy one-button set-up
- LED indication of operation and functions
- Point-to-Point and Point-to-Points links
- IP65: for indoor and outdoor use

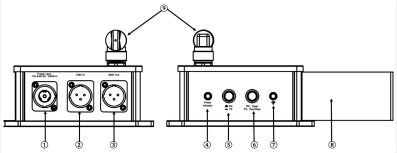

Connectors and controls

1 power
2, 3 DMX In/Out
4 power indicator
5 TX/RX selector
6 pair/clear
7 DMX indicator
8 bracket
9 antenna

Manufacturer's drawing, labels in English

Technical data

Power supply	100-240 V AC, 50/60 Hz
Power consumption	max. 5 W
Frequency	2.4 GHz ISM band, 58 channels
Operating range	approx. 400 m (line of sight)
Latency	<5 ms
DMX connector	IP65, 3-pin XLR, input/output
Net weight	1.40 kg (with mounting bracket)
Temp. and humidity	0°C - 40°C; 20% - 80%
Mounting	floor standing or on truss

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, version er. 1.0 (20250903), fos-lighting.eu →

⚠ **Read the entire user manual and follow the safety rules before using the device.**

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD

Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems

Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl