

PRODUCT DATA SHEET · EN

FOS Pocket Cyclone


IP65 outdoor LED blinder/strobe

IP65-rated LED blinder/strobe with a 1 × 100 W warm white COB source (2700 K) and 24 RGB5050 LEDs.

100 W	24	IP65	3 kg
COB SOURCE	RGB5050 LEDS	IP RATING	WEIGHT

Key features

- Warm white COB source (2700 K) plus an Aura source with RGB5050 LEDs.
- DMX512 control (11CH and 73CH modes), Master/Slave and Auto Run.
- Selectable PWM frequency: 4, 8, 16 or 24 kHz.
- Dimmer curves: linear, square and S-curve; dimmer speed: standard, fast or slow.
- Fan modes: automatic, silent and high speed; key lock available.
- A special quick lock allows fast linking into any shape.

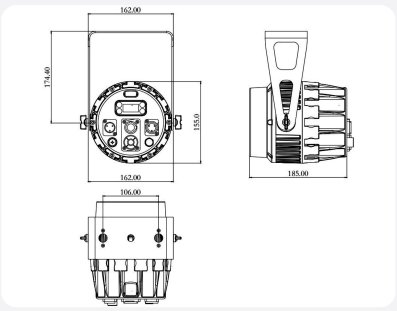

Dimensions (mm)
Manufacturer's drawing, dimensions in mm.

Technical data

Input voltage	AC 90-240 V 50/60 Hz
Light source	1 × 100 W warm white COB (2700 K) + 24 × RGB5050 (Aura source)
DMX channels	11CH / 73CH
Beam angle	18°
PWM frequency	4 kHz / 8 kHz / 16 kHz / 24 kHz
Control	DMX512 / Master&Slave / Auto Run
IP rating	IP65
Dimensions	185 × 162 × 174 mm
Weight	3 kg
Ambient temperature	from -20 °C to 40 °C
Housing temperature	may reach 80 °C with stable cooling

Accessories

FOS Pocket Cyclone Rgbal →
Professional IP65 blinder/strobe for outdoor use

Documentation

User manual PL and original EN →
on the product page

Manufacturer's original manual →
EN, fos-lighting.eu

⚠ **Read the whole manual and safety rules before use; despite the IP65 rating, its point 1.3 permits indoor operation only.**

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD
Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems
Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl