

PRODUCT DATA SHEET · EN

FOS 12ch DMX console


DMX fader controller

DMX controller with 12 channel faders and a master fader, with a female 3-pin XLR output. Powered by the supplied 9 V DC power adapter.

12 + master	XLR 3-pin	9 V DC	1.2 kg
CHANNELS	DMX OUTPUT	POWER SUPPLY	WEIGHT

Key features

- 12 channel faders and a master fader
- DMX output: female 3-pin XLR
- Compact design and simple operation
- 9 V DC power adapter included
- Power indicator and power switch on the housing
- DMX daisy chain connection

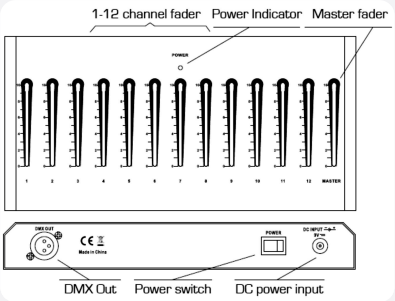

Controller layout

1-12 channel faders
MASTER master fader
DMX OUT DMX output
POWER power indicator and switch
DC INPUT 9 V DC power socket

Manufacturer's drawing, EN labels

Technical data

Channels	12 faders + master fader
Signal output	female 3-pin XLR
Power supply	9 V DC adapter
Dimensions	258 × 168 × 50 mm
Weight	1.2 kg
DMX chain termination	110 Ω, ¼ W resistor
Distance from flammable surfaces	min. 0.5 m

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, fos-lighting.eu →

⚠ **Read the entire user manual before using the controller and follow the safety instructions.**

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD

Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems

Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl