

PRODUCT DATA SHEET · EN

FOS 6ch DMX console

6-channel DMX controller

DMX-6 controller for controlling fixtures, dimmers and effect devices via DMX signal. Six channel faders and a master fader, 3-pin XLR output.

6 + master	3-pin XLR female	0.8 kg
CHANNELS	DMX OUTPUT	WEIGHT

Key features

- 6 channel faders and a master fader
- DMX output on 3-pin female XLR
- Powered by a 9 V DC adapter (included) or a 9 V battery
- Compact design and simple operation
- Daisy chain connection of DMX devices, line terminated with a 110 Ω resistor

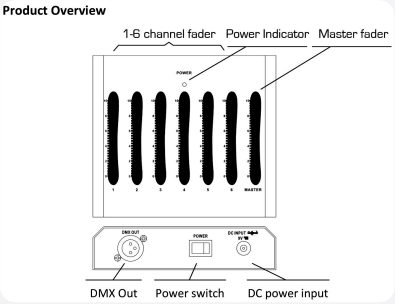

Unit layout

1-6 channel faders 1-6
POWER power indicator
MASTER master fader
DMX OUT DMX output
POWER power switch
DC INPUT DC power input

Manufacturer's drawing, EN labels

Technical data

Output	3-pin XLR female
Channels	6 channel faders + master fader
Power supply	9 V DC adapter or 9 V battery 6LR61 or 6LF22
Dimensions	173 × 154 × 60 mm
Weight	0.8 kg
DMX line termination	110 Ω, ¼ W resistor

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, fos-lighting.eu →

Read the entire user manual before use and follow the safety rules.

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD

Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems

Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl