

PRODUCT DATA SHEET · EN

FOS Bar Pente


RGBWA LED lighting bar

Lighting bar with 18 RGBWA 5-in-1 15 W LEDs and control of each individual pixel. Power 270 W, net weight 4.62 kg.

18 × 15 W	270 W	10/28/90/100	4.62 kg
LEDS	POWER	DMX CHANNELS	NET WEIGHT

Key features

- RGBWA colour mixing: more than 16.7 million colours
- Control of each individual LED pixel
- Control modes: DMX512, Master-slave, sound activation and Auto
- 0-100% dimming, various strobe effects with speed adjustment
- Connectors: Powercon input/output, 3-pin DMX input/output
- Control panel with display and MENU, UP, DOWN and ENTER buttons

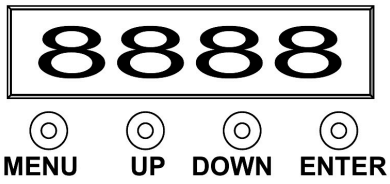

Control panel

MENU function selection
UP change value
DOWN change value
ENTER confirm

Manufacturer's drawing

Technical data

Supply voltage	AC 90V-245V/50-60Hz
Power	270 W
LEDs	18 pcs of 15 W RGBWA 5-in-1 LEDs
Beam angle	15°, 25° or 40°
Lifetime	>50000 hours
Control	DMX512, Master-slave, sound activation, Auto
DMX channels	10/28/90/100
Dimming	0-100%, various strobe effects, speed adjustment
Connectors	Powercon input/output, 3-pin DMX input/output
Protection rating	IP20
Net weight	4.62 kg

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, fos-lighting.eu →

⚠ **Read the user manual before operating the unit and follow the safety rules.**

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD

Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems

Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl