

PRODUCT DATA SHEET · EN

FOS Artnet Controller PRO


ArtNet to DMX converter and DMX splitter

An adapter for expanding DMX networks: it converts Ethernet data into 8 DMX universes. It can also work as a DMX splitter with 2 inputs and 8 outputs.

8	2	AC 100-240 V	2.2 kg
DMX OUTPUTS	DMX INPUTS	POWER SUPPLY	WEIGHT

Key features

- ArtNet (V4) and DMX support
- Works as an ArtNet to DMX converter, as a DMX splitter, or performs both functions at the same time
- 2 RJ45 Ethernet connectors, TCP/IP 10/100M
- 16 × 2 character LCD for menu and functions, plus 5 menu buttons
- LED indicator for each output
- USB port solely for firmware updates from a USB flash drive

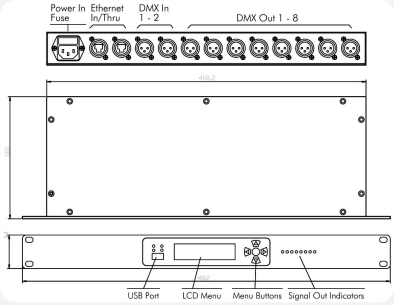

Product overview
Manufacturer's drawing

Technical data

Power supply	AC 100-240 V, 50-60 Hz
Power consumption	6 W
Data inputs	EtherCon and 3-pin XLR input (or 5-pin)
Data outputs	8 × 3-pin XLR output (or 5-pin)
Data thru	EtherCon
Dimensions	482 × 168 × 44 (1U rack mounting)
Weight	2.2 kg
Mounting	standard 19″ rack or flat surface
Place of use	indoor use only

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, fos-lighting.eu →

⚠ **Read the entire user manual and follow the safety rules before using the unit.**

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD

Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems

Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl