

PRODUCT DATA SHEET · EN

FOS 36 DMX Console


DMX fader controller

Compact DMX controller with 36 fader channels (12 faders across 3 pages), a channel and DMX value display and a 3-pin XLR output.

36	12 + master	340 × 140 × 65 mm
CHANNELS	FADERS	DIMENSIONS

Key features

- 12 faders and a dimmer master, 3 pages: 36 channels in total
- Display shows the selected channel and DMX value
- 3-pin XLR Female signal output
- Powered by 5 V DC (USB Type-C) or a 9 V battery (not included)
- USB port for a wireless DMX transmitter (not included)
- Power adapter included

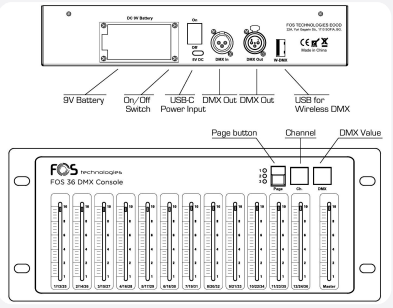

Product overview

1 9 V battery
2 on/off switch
3 USB-C input
4 DMX output
5 USB for wireless DMX
6 Page button

Manufacturer's drawing, EN labels

Technical data

Channel faders	36
Faders	12 faders + 1 dimmer master, 3 pages
Display	selected channel and DMX value
USB	for a wireless DMX transmitter (not included)
Signal output	3-pin XLR Female
Power supply	5 V DC (USB Type-C) or 9 V battery (not included)
Power adapter	included
Dimensions	340 × 140 × 65 mm
Weight	1.6 kg

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, fos-lighting.eu →

> ⚠ **Before using the controller, read the entire user manual and follow the safety rules.**

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD

Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems

Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl