

PRODUCT DATA SHEET · EN

FOS Splitter Quadro


DMX-512 splitter, 4 inputs and 16 outputs

Versatile DMX-512 splitter with 4 inputs and 16 outputs that distributes and regenerates DMX signals. It makes stage lighting control easier.

4 / 16	100-240 V AC	1.9 kg
DMX INPUTS / OUTPUTS	POWER SUPPLY	NET WEIGHT

Key features

- Separate optical and electronic isolation on all inputs and outputs
- 4 input channels work without affecting one another, like 4 separate splitters
- Black aluminium profile panel
- M12 hole for a clamp, plus safety cables, for truss mounting
- Can be mounted in a standard 19″ rack, 1U

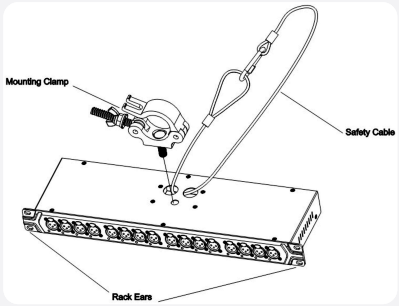

Mounting diagram
Manufacturer's drawing

Technical data

DMX IN inputs	4
DMX OUT outputs	16
Supply voltage	100-240 V AC, 50/60 Hz
Power consumption	max. 10 W
Fuse	T1A, 250 V AC
Power connector	PowerCon IN/OUT
Dimensions (W × H × D)	482.6 × 44.5 × 143 mm
Net weight	1.9 kg

Documentation

User manual PL and original EN
on the product page →

Manufacturer's original manual
EN, fos-lighting.eu →

⚠ **Read the entire user manual before using the splitter and follow the instructions in it.**

Manufacturer and distributor

MANUFACTURER

FOS Technologies LTD
Bulevard Iliensko Shose 8, Sladova Baza ZMM
Sofia, Bulgaria
info@fos-lighting.eu · www.fos-lighting.eu

DISTRIBUTOR IN POLAND

VEX Systems
Media Rental Oleksandr Zakariya
al. Niepodległości 20/55, 02-653 Warszawa, Poland
NIP 5214048857 · +48 794 797 959
biuro@vex-systems.pl · vex-systems.pl